

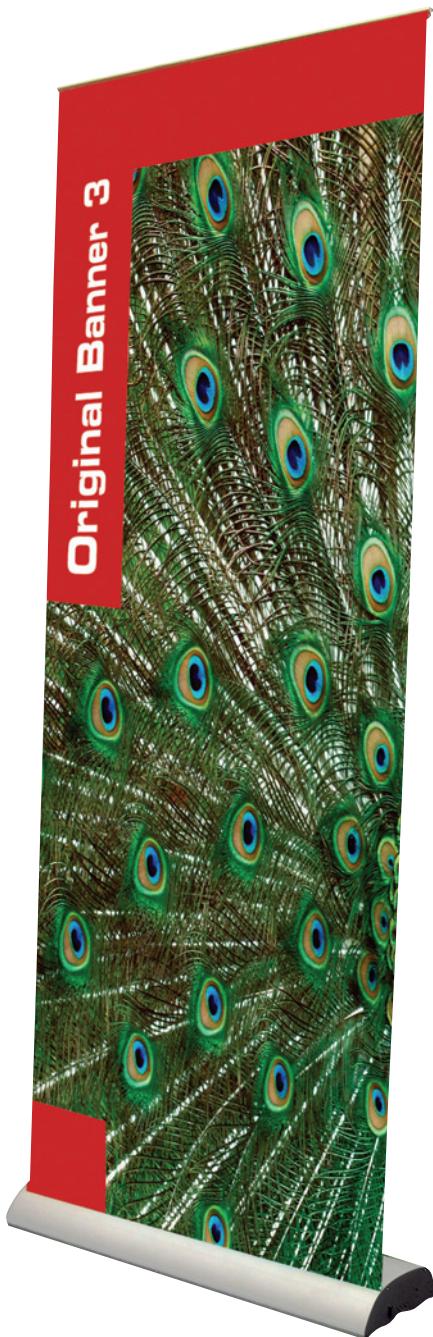


# Original Banner 3



## features & benefits

- Choice of 6 widths, from 600mm to 2000mm
- Increased internal housing for thicker graphics (up to 450 microns banner vinyl)
- Quick-change graphic release
- Quick-change Twista Plus snap rail
- Available in anodised silver or black powdercoated finish
- Bungee pole

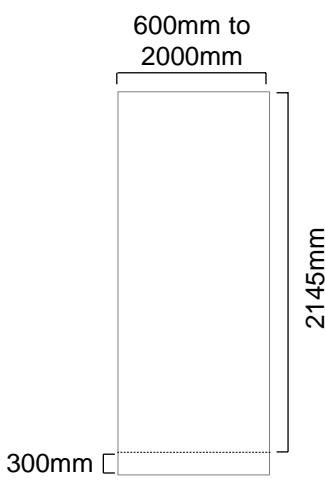

Twista Plus Top Rail



Slide-in Graphic

### hardware specifications

800mm Hardware Dimensions (mm):  
2245 max (h) x 818 (w) x 265 (d) approx.  
84.45" (h) x 32.2" (w) x 10.43" (d) approx.  
Base Dimensions (mm):  
84 (h) x 818 (w) x 265 (d) approx.  
3.31" (h) x 32.2" (w) x 10.43" (d) approx.  
Weight:  
4kg (9.92lbs) approx (including carry bag)

### graphic specifications


Visible Graphic Dimensions (mm):  
2145 (h) x 600 to 2000 (w)  
84.45" (h) x 23.62" to 78.74" (w)  
Substrate: Add 300mm (12") to base of graphic to allow for roller mechanism  
Recommended material thickness  
225 - 450 microns (8.86 - 17.72 Mils)

### additional info

Included in kit:  
Base, top rail, bungee pole  
and carry bag

# Assembly Instructions


## Banner stand assembly




Open up the bungee pole until all 3 parts are fitted securely together.



Slot the pole into the hole on the base and push down to secure fit.



Pull graphic out of unit and tilt back to reach the top of the pole.



Fit pole into the top rail fixing.

**Important:** Hold the top rail whilst lowering the banner to prevent damage to the graphic. (do not drop)


## Graphic attachment - Snap Rail



Open up snap rail as shown.




Slide the graphic through the end opening and move down until entire graphic edge is inserted




Close rail firmly onto graphic so it is fitted securely.

## Graphic attachment - Base



Adhere the insert to the back of the graphic.



Slide the insert and graphic into the base.



Whilst holding the graphic, remove the locking pin from the base and gently allow the graphic to retract.

**WARNING:** Always attach graphic to base and top rail before removing the locking pin.

**After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently. Opening the cassette may invalidate the product warranty.**